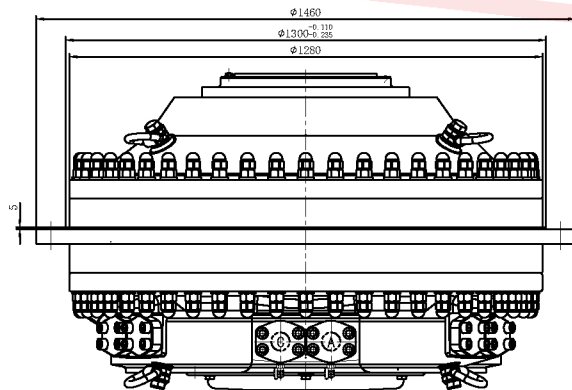
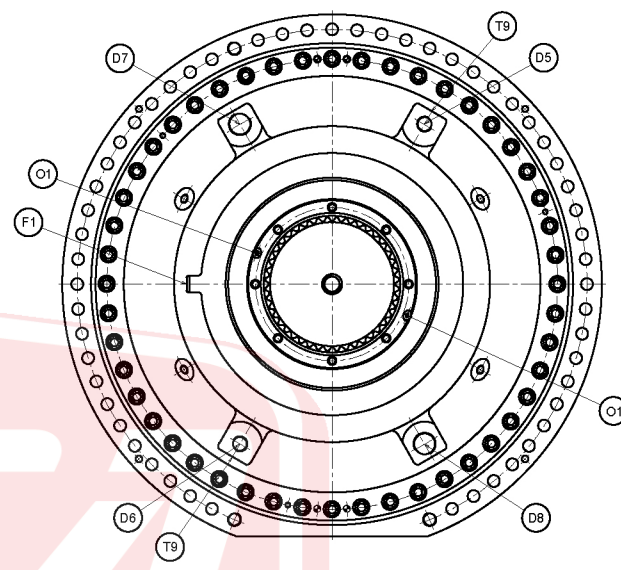
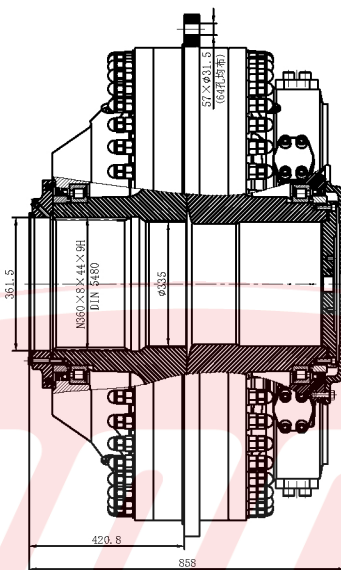
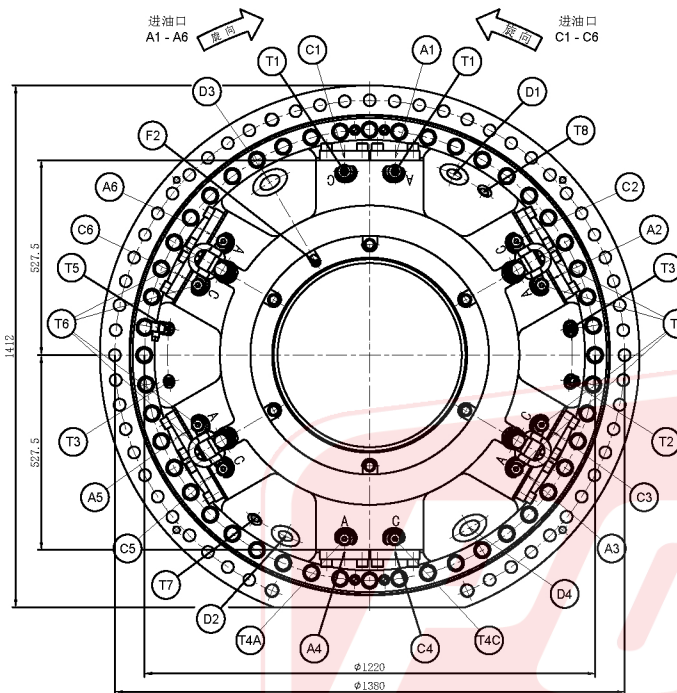


| 接口             | 描述     | 数量 | 接口规格            |
|----------------|--------|----|-----------------|
| A1             | 进油主接口  | 1  | SAE 2" **       |
| C1             | 进油主接口  | 1  | SAE 2" **       |
| A2-A6          | 进油备接接口 | 5  | SAE 2" **       |
| C2-C6          | 进油备接接口 | 5  | SAE 2" **       |
| D1             | 进油口    | 1  | BSP 2"          |
| D2, D3, D5, D6 | 进油备接接口 | 4  | BSP 1 1/2"      |
| D4, D7, D8     | 进油备接接口 | 3  | BSP 2"          |
| F1, F2         | 进油接口   | 2  | BSP 1"          |
| T1             | 进油接口   | 2  | M16x2           |
| T2             | 进油接口   | 1  | M16x2           |
| T3, T6         | 进油接口   | 1  | BSP 1"          |
| T4A, T4C       | 进油接口   | 2  | BSP 1"          |
| T5             | 进油接口   | 1  | BSP 1"          |
| T8             | 进油接口   | 4  | 1 1/2" 12-UN-2B |
| T7, T9         | 进油接口   | 2  | 1 1/2" 12-UN-2B |
| O1             | 进油接口   | 2  | BSP 1"          |

Bm2000S 花键马达技术参数

| 马达类别    | 马达型号        | 排量 V <sub>l</sub><br>cm³/rev | 单位扭矩 T <sub>d</sub><br>Nm/bar | 最大扭矩 T <sub>d</sub><br>Nm/bar | 最大转速 n <sub>max</sub><br>rev/min | 最高压力 p <sub>max</sub><br>bar | 峰值功率 P <sub>max</sub><br>kW |
|---------|-------------|------------------------------|-------------------------------|-------------------------------|----------------------------------|------------------------------|-----------------------------|
| Bm2000S | Bm2000-1000 | 63.108                       | 1.000                         | 328                           | 70                               | 350                          | 2.393                       |
|         | Bm2000-1200 | 75.832                       | 1.200                         | 394                           | 58                               | 350                          | 2.384                       |
|         | Bm2000-1400 | 88.301                       | 1.400                         | 460                           | 48                               | 350                          | 2.307                       |
|         | Bm2000-1600 | 100.770                      | 1.600                         | 526                           | 41                               | 350                          | 2.247                       |
|         | Bm2000-1800 | 113.748                      | 1.800                         | 591                           | 36                               | 350                          | 2.227                       |
|         | Bm2000-2000 | 126.725                      | 2.000                         | 657                           | 32                               | 350                          | 2.207                       |

密封材料

密封材料